

## ASP 5 DV

5" TWO-WAY ACTIVE SPEAKER WITH STEREO AMPLIFIER AND REAR PROTECTION ENCLOSURE



### Description

This two-way active speaker with stereo amplifier is composed of a 5" + tweeter and with a rear protection box. Specially designed for the reproduction of music and voice in the sound of interiors of houses, hotels, halls, offices, schools, etc. Fully built for ceiling mounting along with RT 5 grille, specified below. B-5 flush-mount box.




### Technical features

Reference	ASP 5 DV
Speaker	Woofer 5"+ Tweeter
Impedance	2Ω
Power	10+10W
Frequency response	90Hz-20kHz
Sensibility (1W/1m)	90 dB
Dispersion	150°
Connectors	Strip terminals
Material	ABS
Weight	0,58 kg
Dimensions	Ø132x70 mm
Code	100312

### RT 5

5" GRILLE WITH ABS TRIM RING FOR SP 5, SP 5 DV, ASP 5 AND ASP 5 DV SPEAKERS.

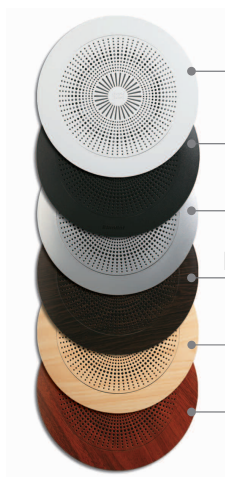

**RT 5 G** | Ref. Graphite

**RT 5 S** | Ref. Silver

**RT 5 W** | Ref. Wenge

**RT 5 P** | Ref. Pine

**RT 5 R** | Ref. Oak

**RT 5** | Grille colour white

ABS grille for 5" speakers (SP 5, SP 5 DV, ASP 5 and ASP 5 DV)

- This grilles are of direct fixation to B5 flush-mount box by means of supplied screws.
- To fasten this grilles into plaster ceilings or false ceilings, use set of springs GR10.
- For fixing to other 5" speaker built-in boxes GR20 set of claw-screws is a must.
- Dimensions: Ø185x9 mm. Cutout: Ø150 mm