

S 300 FM BT



Technical specifications

Reference	S 300 FM BT
Channels	3 (Mono)
Amplifier	Stereo 1.5 + 1.5W
BLUETOOTH	A2DP transmission protocol
Volume scales	31
Min load impedance	8Ω
Power supply	12Vcc/330mA
Stand-by power consumption	25mA
Operational power consumption	69mA
Connectors	Strip terminals
Material	ABS
Accessories	Metal frame included
Weight	0,08 Kg.
Dimensions	44 x 44 x 36mm. 5mm
Colour	white off-white graphite silver
Code	100178 100179 100180 100181

CHARACTERISTICS AND FUNCTIONS

FM radio functions


- Radio station show on display
- Individual digital stereo built-in FM tuner
- Upwards and downwards automatic scan
- Step by step manual scan
- Automatic adjustment of FM sensitivity
- Last radio station memory
- Pre-set radio station memories

Sound functions


- Selector for BLUETOOTH connection
- Digital control of bass, treble and balance levels
- Digital clock with LCD screen
- Independent alarm clock for each room with alarm mode selector
- AutoOn function programmable up to 99 minutes
- 1.5+1.5W stereo built-in amplifier
- Digital assignment of zone number
- Auxiliary audio input
- Minimum load impedance: 8 ohms
- 30-step digital volumen control
- Volume level memory
- Pre-set ideal volumen level
- General system on/off from any control module
- Automatic control of central unit built-in socket
- Adjustable sleep function 99'
- Adjustment of incoming call volumen level
- "Do not disturb" mode
- Message override

* The decorative frame is not included in the reference.

Installation diagram with Central Unit

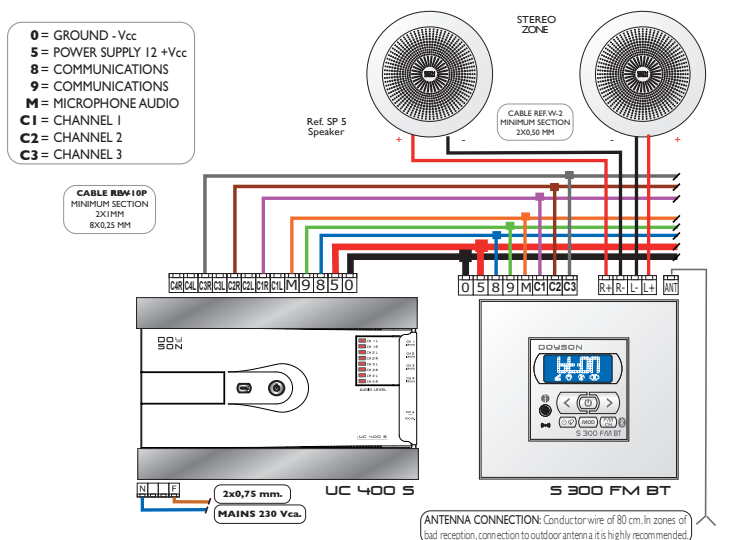

Installation diagram with power supply

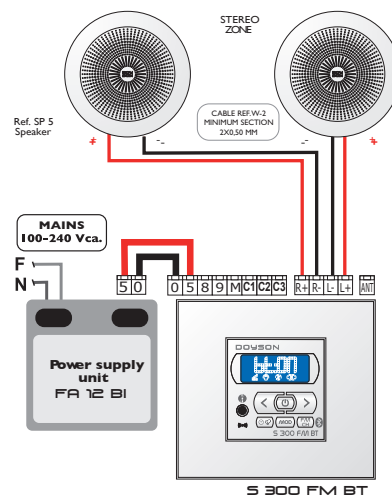

For AUXILIARY CONNECTION of audb, TV, PC, etc. please use 0(ground) and C1