



### Technical specifications

Reference	S 100 BT
Channels	I
Amplifier	Stereo 1.5 + 1.5W
BLUETOOTH	A2DP transmission protocol
Volume scales	31
Min load impedance	8Ω
Power supply	12Vcc/330mA
Stand-by power consumption	25mA
Operational power consumption	69mA
Connectors	Strip terminals
Material	ABS
Accessories	Metal frame included
Weight	0,08 Kg.
Dimensions	44 x 44 x 36mm. 5mm
Colour	white   off-white   graphite   silver
Code	100162   100163   100164   100165

### CHARACTERISTICS AND FUNCTIONS

#### Sound functions


- Selector for BLUETOOTH connection
- Digital control of bass, treble and balance levels
- Digital selection of stereo/mono mode
- Digital clock with LCD screen
- Independent alarm clock for each room with alarm mode selector
- AutoOn function programmable up to 99 minutes
- 1.5+1.5W stereo built-in amplifier
- Digital assignment of zone number
- Auxiliary audio input
- Minimum load impedance: 8 ohms
- 30-step digital volumen control
- Volume level memory
- Pre-set ideal volumen level
- General system on/off from any control module
- Automatic control of central unit built-in socket
- Adjustable sleep function 99'

#### Intercom functions

- "Hands free" mode electret microphone
- General calls
- Individual calls up to 128 zones
- Last call memory
- Simultaneous listening of different "baby-phones" for monitoring
- Adjustment of incoming call volumen level
- "Do not disturb" mode
- Message override

\*The decorative frame is not included in the reference.

Installation diagram with Central Unit

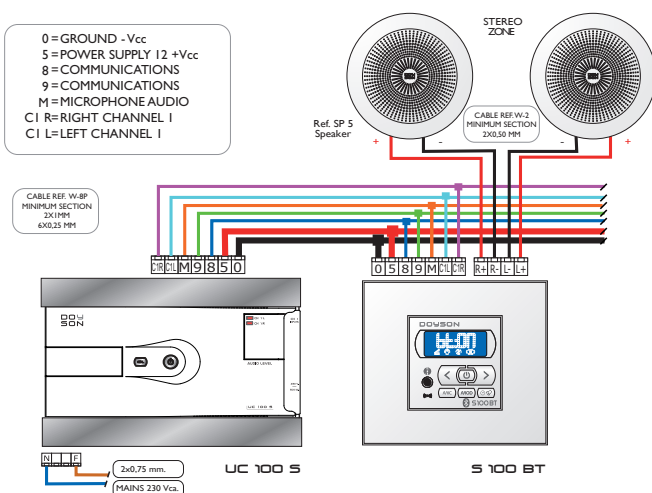

Installation diagram with power supply

