

I STEREO CHANNEL CONTROL MODULE WITH FM AND BLUETOOTH

S 10 FM BT



Technical specifications

Reference	S 10 FM BT
Channels	I
Amplifier	Stereo 1.5 + 1.5W
BLUETOOTH	A2DP transmission protocol
Volume scales	31
Min load impedance	8Ω
Power supply	12Vcc/330mA
Stand-by power consumption	25mA
Operational power consumption	69mA
Connectors	Strip terminals
Material	ABS
Accessories	Metal frame included
Weight	0,08 Kg.
Dimensions	44 x 44 x 36mm. 5mm
Colour	white off-white graphite silver
Code	100158 100159 100160 100161

CHARACTERISTICS AND FUNCTIONS

FM radio functions


- Individual digital stereo built-in FM tuner
- Upwards and downwards automatic scan
- Automatic adjustment of FM sensitivity
- Last radio station memory
- 4 Pre-set radio station memories

Sound functions

- Selector for BLUETOOTH connection
- Headphone socket
- 1.5+1.5W stereo built-in amplifier
- Digital assignment of zone number
- Auxiliary audio input
- Minimum load impedance: 8 ohms
- 30-step digital volumen control
- Volume level memory
- Pre-set ideal volumen level
- General system on/off from any control module
- Automatic control of central unit built-in socket
- Adjustable sleep function 60'
- Message override

* The decorative frame is not included in the reference.

Installation diagram with Central Unit

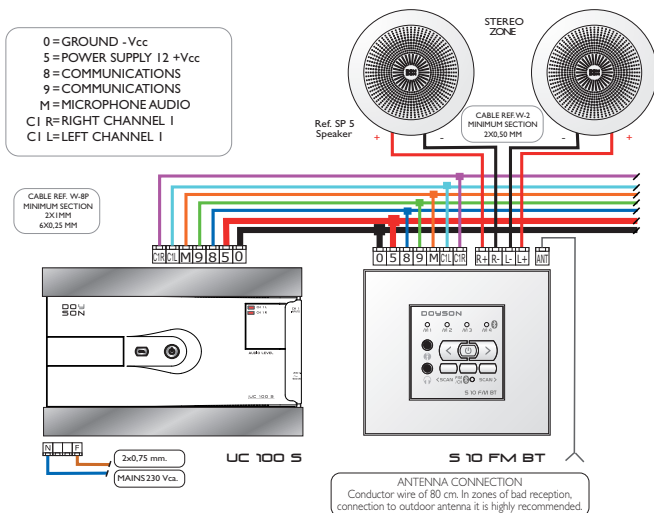

Installation diagram with power supply

