

4 CHANNEL CONTROL MODULE WITH BLUETOOTH

S 40 BT



CHARACTERISTICS AND FUNCTIONS


- Selector for BLUETOOTH connection
- Headphone socket
- 1.5W mono built-in amplifier
- Digital assignment of zone number
- Auxiliary audio input
- Minimum load impedance: 8 ohms
- 30-step digital volumen control
- Volume level memory
- Pre-set ideal volumen level
- General system on/off from any control module
- Automatic control of central unit built-in socket
- Adjustable sleep function 60'
- Message override
- "Do not disturb" mode

Technical specifications


Reference	S 40 BT
Channels	4
Amplifier	Mono audio 1.5W
BLUETOOTH	A2DP transmission protocol
Volume scales	31
Min load impedance	8Ω
Power supply	12Vcc/330mA
Stand-by power consumption	25mA
Operational power consumption	69mA
Connectors	Strip terminals
Material	ABS
Accessories	Metal frame included
Weight	0,08 Kg.
Dimensions	44 x 44 x 36mm. 5mm
Colour	white off-white graphite silver
Code	100154 100155 100156 100157

* The decorative frame is not included in the reference.

Installation diagram with Central Unit

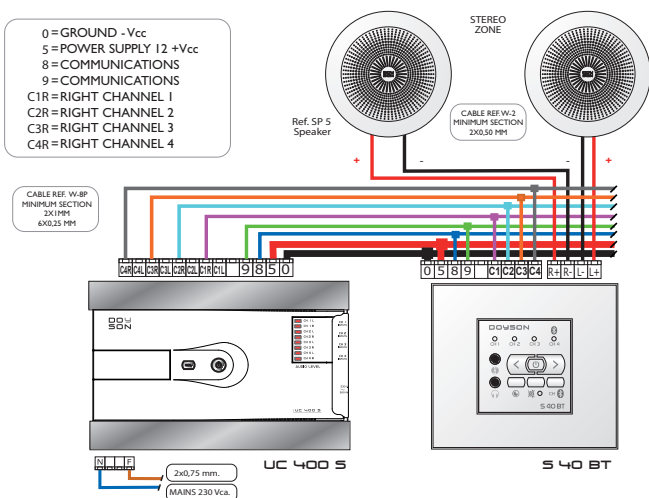

Installation diagram with power supply unit

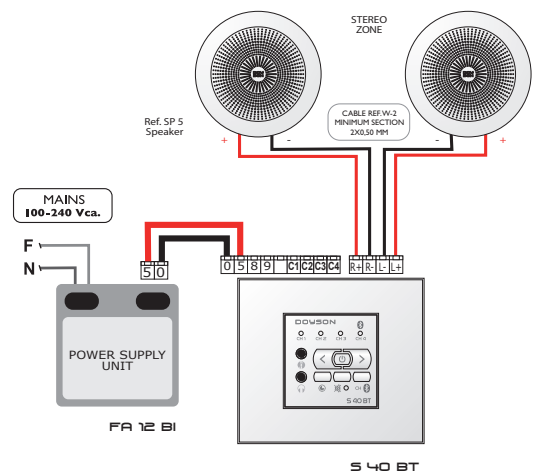

For AUXILIARY CONNECTION of audio, TV, PC, etc. please use 0 (ground) and C1.