### I STEREO CHANNEL CONTROL MODULE WITH LCD SCREEN AND FM TUNER

# S 100 FM



## **Technical specifications**

Reference	S 100 FM
Channels	I
Amplifier	Stereo 1.5 + 1.5W
Volume scales	31
Min load impedance	8Ω
Power supply	12Vcc/330mA
Stand-by power consumption	25mA
Operational power consumption	69mA
Connectors	Strip terminals
Material	ABS
Accessories	Metal frame included
Weight	0,08 Kg.
Dimensions	44 x 44 x 36mm. 5mm
Colour	white   off-white   graphite   silver
Code	100016   100017   100018   100019

### CHARACTERISTICS AND FUNCTIONS

#### FM radio functions

- Radio station show on display
- Individual digital stereo built-in FM tuner
- Upwards and downwards automatic scan
- Step by step manual scan
- Automatic adjustment of FM sensitivity
- Last radio station memory
- Pre-set radio station memories


#### Sound functions

- Digital control of bass, treble and balance levels
- Digital selection of stereo/mono mode
- Digital clock with LCD screen
- Independent alarm clock for each room with alarm mode selector
- AutoOn function programmable up to 99 minutes
- 1.5+1.5W stereo built-in amplifier
- Digital assignment of zone number
- Auxiliary audio input
- Minimum load impedance: 8 ohms
- 30-step digital volumen control
- Volume level memory
- Pre-set ideal volumen level
- General system on/off from any control module
- Automatic control of central unit built-in socket
- Adjustable sleep function 99'


#### Intercom functions

- "Hands free" mode electret microphone
- General calls
- Individual calls up to 128 zones
- Last call memory
- Simultaneous listening of different "baby-phones" for monitoring
- Adjustment of incoming call volumen level
- ''Do not disturb'' mode
- Message override

\*The decorative frame is not included in the reference.

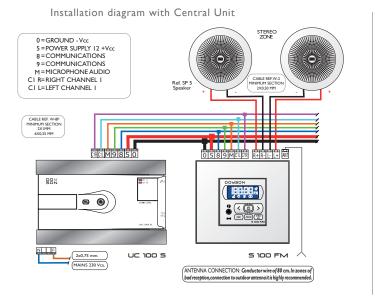

#### Installation diagram with power supply



SERIE